



Water Management of Transboundary Catchments

Contribution from the TRANSCAT project

Marco Estrela, ISO

September 9, 2005



Fifth Framework Programme
1998 - 2002



ENERGY, ENVIRONMENT
AND SUSTAINABLE DEVELOPMENT



Contents

- Introduction
- The TRANSCAT project
- TRANSCAT DSS



INTRODUCTION



Border areas usually belong to the most problematic regions of many countries. In particular, borders rarely respect the hydrogeological limits of a natural catchment.

Usually the catchment, belonging to more states, is managed in different ways, depending on each state, respecting no interests, historical roots, and legislative rules of the neighbour across the border.





INTRODUCTION



These different approaches to utilization of the catchment may have catastrophic effects, and may cause hardly solvable problems and high financial and environmental costs.

Integrated water management in transboundary catchment areas in Europe is among the major issues to be addressed in the implementation of the WFD.





TRANSCAT

Integrated Water Management of Transboundary Catchments

Co-financed by the European Union under the 5th FP of Research

Duration: 1st February 2003 - 31st January 2006

Total budget: 2.6 M€ (1.88 M€ from the EC)

12 partners from 9 countries

<http://transcat-project.net>



Fifth Framework Programme
1998 - 2002



ENERGY, ENVIRONMENT
AND SUSTAINABLE DEVELOPMENT





Objectives



The main objective of TRANSCAT is to support borderland regions by developing an operational and integrated DSS for optimal water management of their catchments.

Key requirements are multilingual support, interactive visualisation interface and the possibility of plugging in numerical models, particularly of the cross-border water resource system.





Objectives



The system will support situations ranging from operational management, involving information basis and modelling, to strategic decision analysis and making, with the use of multiple option and multiple objective assessment tools, as well as distributed decision instruments facilitating participative management.

The system will be tested for the conditions of the transboundary pilot areas.



(Czech Rep. / Poland)

Bělá river



Pasvik river

(Norway / Russia)

Šumava catchment

(Czech Rep. / Germany)



Guadiana river


Portugal / Spain



Nestos river

(Greece / Bulgaria)

The TRANSCAT DSS is composed of **three** essential kinds of elements, from the top to the bottom of the scheme, indicated with different colours:

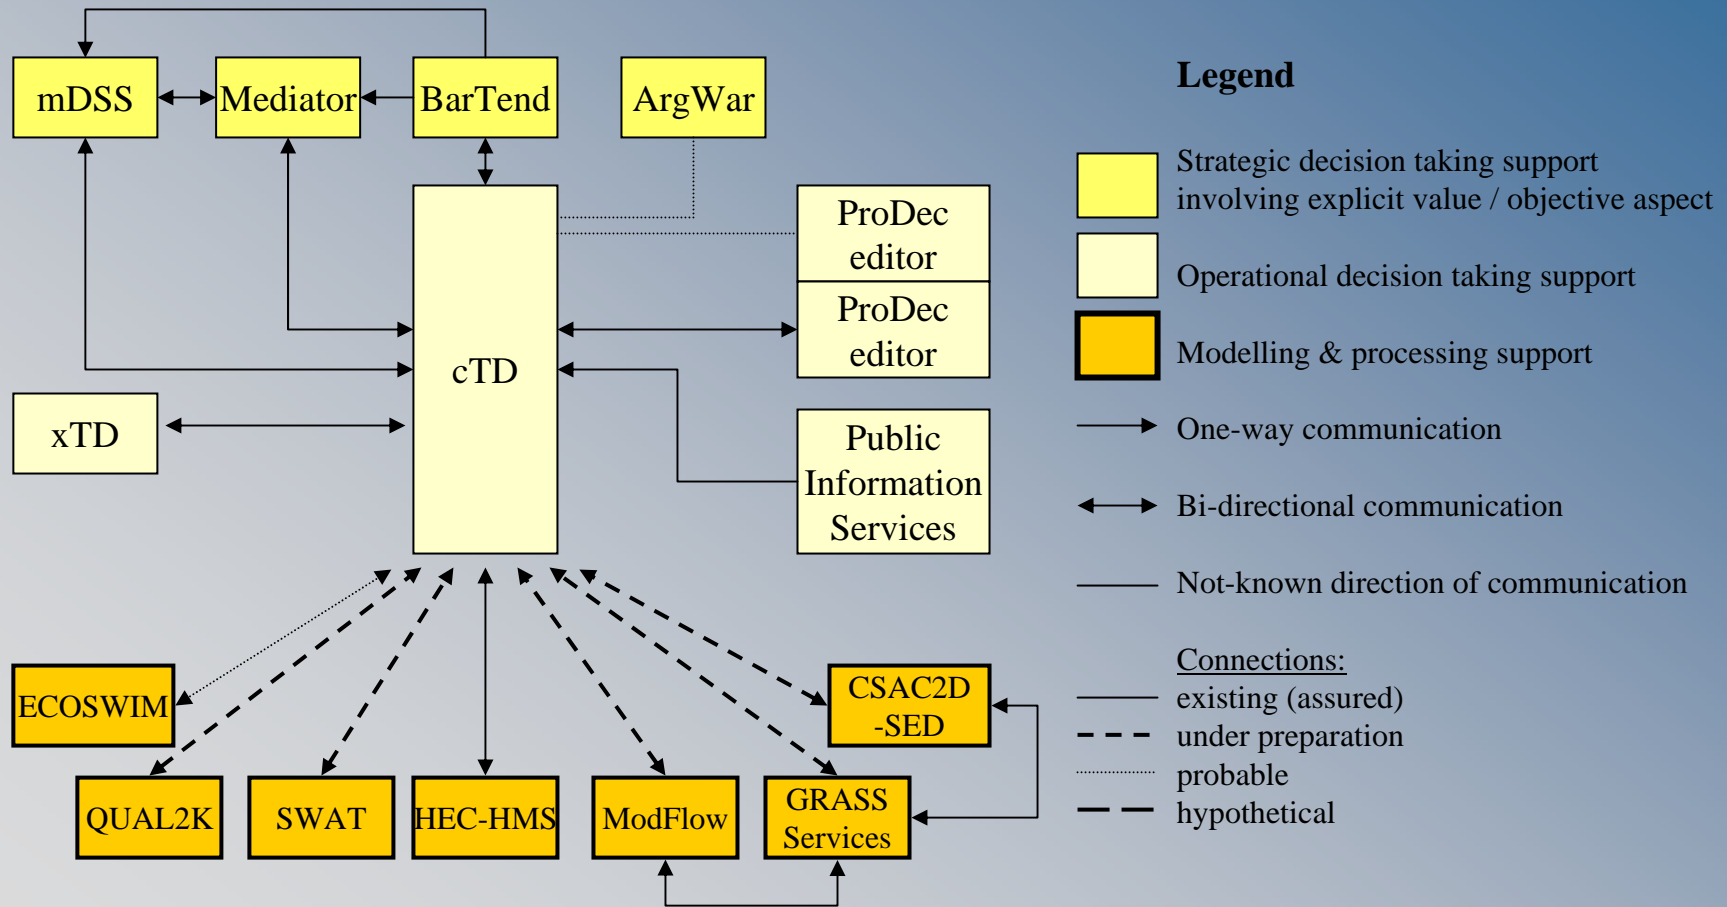



- The *decision analytic applications* (DAs), including mDSS (MULINO), Mediator, ProDec, BarTend (Bargain) and ArgWar, most of them associated with strategic type of decisions (policies, large projects, etc.), but also with the design of decision procedures (ProDec).

- The DAs developed and/or included in the TDSS range from very simple ones, like BarTend, allowing for the establishment of bargaining output in well-structured uncomplicated situations, to relatively complex, like mDSS, which includes several stages and options in the process of evaluation within a broadly defined projects.





TRANSCAT DSS – system components



- The *core system* (CTD), being the main data provision, processing and interfacing tool, oriented mainly at operational functions. The cTD serves as the main interfacing tool for the elements of the system;

- The *models*, and the related applications, serving to represent individual components of the natural, technical and socio-economic object system (e.g. the HEC-HMS surface flow model, the MODFLOW underground flow model, etc.).

The modelling layer allows *prediction*, even if at a qualitative level, scenario or policy construction, or identification (e.g. through “simulation/derivation”) of data items not observed directly.




The TDSS is not an integrated system in the sense of “stiff” connections between the system elements.

First, all of its elements can be used as self-standing entities. The connections are established according to needs.

A concrete TDSS implementation can be configured according to the needs of a specific object system.

Thus, out of the architecture outlined before, a subsystem would be carved out for purposes of a given object system.

TDSS was designed as distributed system with special regard to environments in which it has to be implemented. These environments are transboundary catchments with occurrence of demands, which are problematic to solve with conventional information systems.

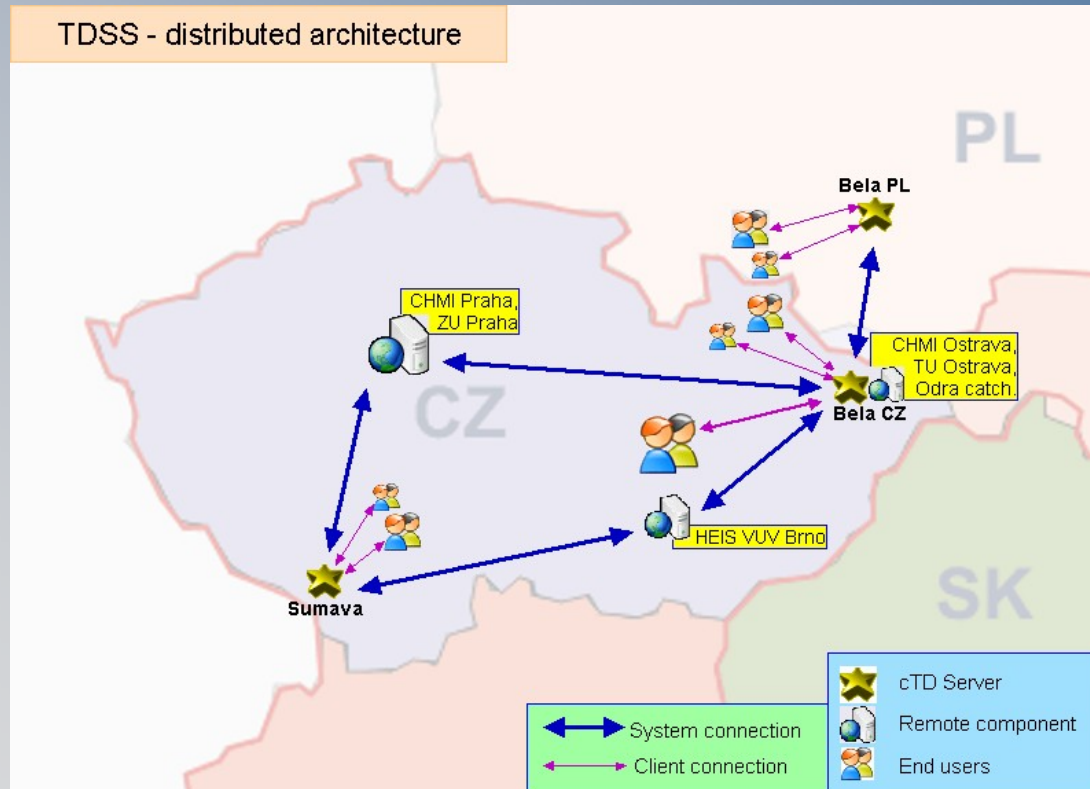



CONNECTION WITH MODELLING SYSTEMS

1. Hydraulic/water balance modeling (simulation of runoff and precipitation, monitoring of water reserves changes due to requirements)
Objective e.g. permits for surface water and groundwater abstraction
2. Underground water fluctuation/flow modeling in saturated and also in unsaturated zone including connection with surface water
Objective e.g. evaluation of quantitative condition of water, evaluation of quantitative impacts in changing of land use, permission of underground water abstraction



3. Modeling of contaminant transport in underground water

Objective e.g. Evaluation of pollutant sources, setup and modification of discharging limits, evaluation of quantitative impacts in changing of land use, permission of underground water abstraction

4. Modeling of surface water flow

Objective e.g. permission of surface water abstraction, discharge of sewage

5. Modeling of contaminant transport in surface water

Objective e.g. Evaluation of pollutant sources, setup and modification of discharging limits, permission of surface water abstraction, discharge of sewage, evaluation of emergency ecological situations

- a) Assessment of pollution source (point-source, diffuse source)
- b) Assessment of quantitative status of water
- c) Assessment of land use change (qualitative, quantitative)
- d) Long term forecast of supply and demand for water
- e) Identification of protected areas
- f) Ecological status assessment of water (biological quality of water, hydro-morphological quality of water, physiochemical quality of water)
- g) Monitoring (Selection of monitoring places, Selection of qualitative compartments, Preparing of monitoring time schedule)



TRANSCAT Prototype



<http://gis.vsb.cz/transcat>

TRANSCAT - TRANSCAT - Microsoft Internet Explorer

Soubor Úpravy Zobrazit Oblíbené Nástroje Nápověda

← Zpět → ↻ Hledat Oblíbené Média

Adresa <http://pcj339p.vsb.cz/transcat/index.php?lang=en> Přejít Odkazy »

Google Search Web PageRank 66 blocked AutoF »

INTEGRATED WATER MANAGEMENT OF TRANSBOUNDARY CATCHMENTS

TRANSCAT

Pilot areas Archive Language

Project TRANSCAT

TransCat main goal is the creation of a Decision Support System (DSS) for optimal water management of transboundary catchments, in context of the implementation of the EU Water Framework Directive ... [More in problematics review](#)

NEWS

15. 07. 2003 First version initiation of Transcat web presentation. For now accessible only from VSB-TUO intranet on address <http://joseph.vsb.cz/transcat/>

Home Overview Results Archive Forum Partners Contacts Links

European Union

Energy, Environment and Sustainable Development

Fifth Framework Programme 1998-2002

Transcat Central

Proposals and notes mail to Josef.Stromsky.hgf@vsb.cz or write us a message to FORUM.

Home | Overview | Results | Partners | Forum | Pilot areas | Archive | Contacts | Links |

SERVER NAME: **pcj339p.vsb.cz** SERVER SOFT: Apache/1.3.27 (Win32)

Last modify: 20. 02. 2004 v 14:06

Page visit count: 992

Internet



Fifth Framework Programme
1998 - 2002



ENERGY, ENVIRONMENT
AND SUSTAINABLE DEVELOPMENT

